

INSTRUCTIONS FOR REMOVING CONTROL SECTION FOR MDH SERIES



Fig.1 Remove top screws



Fig.3 - Remove the insulation from the bottom section and remove screws on the hinge. Now you can remove control/element section from the transition by grasping the top of the control section with one hand and the 3/8" aluminum tube at the bottom with the other and gently pulling towards you.

Fig.2 - MDH Series - Control and Element Section inside Blower Heater

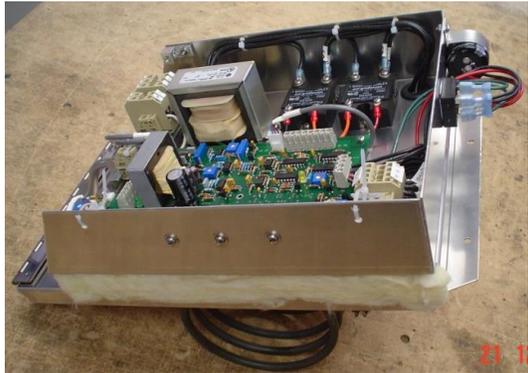


Fig. 4 - Once removed it can be inspected and repaired or shipped to Dexon. (Do not separate the panels when shipping to Dexon.) To access the fan you will need to remove 5 screws and the louver section from the top of the Blower Heater.



Fig.5 - **IMPORTANT:** Plug hole to prevent moisture and gases from entering the environment. **CAUTION:** This area may not longer be classified as non hazardous while the unit is down and confined entry procedures must be observed



Fig.6- When replacing the control section be sure to replace the insulation on the transition only. Do not cover the electrical components